

1. 9:00 A.M. Board Of Commissioners Special Meeting

Documents:

[BOARD AGENDA 06-08-2021.PDF](#)
[BOARD PACKET 06-08-2021.PDF](#)

Board of Commissioners

400 Colorado Ave.
Morris, MN 56267
Ph 320-208-6583



Board of Commissioners

District 1 Bob Kopitzke
District 2 Jeanne Ennen
District 3 Ron Staples
District 4 Donny Wohlers
District 5 Neil Wiese

**STEVENS COUNTY
BOARD OF COMMISSIONERS
Special Meeting
Tuesday, June 8, 2020
9:00 a.m.
Work Session
9:20 a.m.**

A G E N D A

1. 9:00 am CONVENE
PLEDGE
 - Agenda for Approval

2. 9:00 am Jacob Rischmiller – ISG
 - Change Order 03- CD 18 for Approval

3. 9:20 am Work Session

Rebecca Young – County Administrator

- Presentation on American Rescue Plan Funding
- Discussion of County Needs
- Discussion of Potential Policy and Budget

Board of Commissioners

400 Colorado Ave.
Morris, MN 56267
Ph 320-208-6583



Board of Commissioners

District 1 Bob Kopitzke
District 2 Jeanne Ennen
District 3 Ron Staples
District 4 Donny Wohlers
District 5 Neil Wiese

**STEVENS COUNTY
BOARD OF COMMISSIONERS
Special Meeting
Tuesday, June 8, 2020
9:00 a.m.
Work Session
9:20 a.m.**

A G E N D A

1. 9:00 am CONVENE
PLEDGE
 - Agenda for Approval

2. 9:00 am Jacob Rischmiller – ISG
 - Change Order 03- CD 18 for Approval

3. 9:20 am Work Session

Rebecca Young – County Administrator

- Presentation on American Rescue Plan Funding
- Discussion of County Needs
- Discussion of Potential Policy and Budget

Change Order #03 - Tile Locations (8 feet of cover or less)

OWNER Stevens County Drainage Authority
CONTRACTOR Riley Bros. Construction, Inc.
Project: Stevens County Ditch No. 18 - Improvements
ENGINEER'S Contract No.: 19917
ENGINEER ISG

Total Lengths per Branch


Branch Name	Tile Size (in)	Start Station	End Station	Length (ft)
Branch 1 Fork 5	10	63+80	65+30	150
Branch 1 Fork 5 Spur 1	18	0+00	4+50	450
	12	4+50	5+70	120
Branch 2	18	6+30	20+10	1380
	10	20+10	22+20	210
Branch 2	10	26+80	27+90	110
	18	3+00	10+00	700
Branch 3 Fork 2	18	13+30	13+60	30
	15	13+60	21+10	750
	15	21+40	21+60	20
	12	21+60	25+70	410
Branch 4	18	0+00	4+30	430
	18	6+20	15+90	970
	18	17+90	18+40	50
	15	18+40	21+50	310
	15	22+00	23+80	180
	15	26+90	28+00	110
	15	29+80	33+90	410
	12	33+90	37+30	340
Branch 4 Fork 1	12	37+70	38+15	45
	12	0+00	1+10	110
	12	1+70	10+00	830
	10	10+00	12+70	270
Branch 4 Fork 1	10	13+10	14+55	145

Total Lengths per Branch

Branch Name	Tile Size (in)	Start Station	End Station	Length (ft)
Branch 5	18	83+70	93+50	980
	15	93+50	98+15	465
	12	98+15	100+60	245
	12	101+90	102+40	50
	10	102+40	106+65	425
Branch 5 Fork 1	15	0+00	0+80	80
	15	2+30	8+10	580
Branch 5 Fork 2	18	16+15	20+15	400
	10	20+15	23+80	365
	10	31+90	38+45	655
Branch 5 Fork 2 Spur 1	10	0+00	1+80	180
Branch 6	18	29+00	33+00	400
	18	34+30	40+00	570
	15	40+00	45+50	550
	15	53+50	57+00	350
	12	57+00	63+80	680
	12	64+40	65+20	80
	12	66+80	70+50	370
Branch 6 Fork 1	18	0+00	7+00	700
	15	7+00	8+20	120
	15	28+00	41+70	1370
Branch 6 Fork 1 Spur 1	15	42+10	43+35	125
	12	0+00	5+50	550
Branch 6 Fork 1 Spur 1	12	9+90	13+50	360
	10	1+00	19+50	1850
Clear Lake Branch Fork 2	18	69+10	75+80	670
	12	84+60	91+20	660
	12	92+10	92+75	65

Grand Total per Tile Size

Tile Size (in)	Length (ft)
18	7,730
15	5,420
12	4,915
10	4,210
Total	22,275

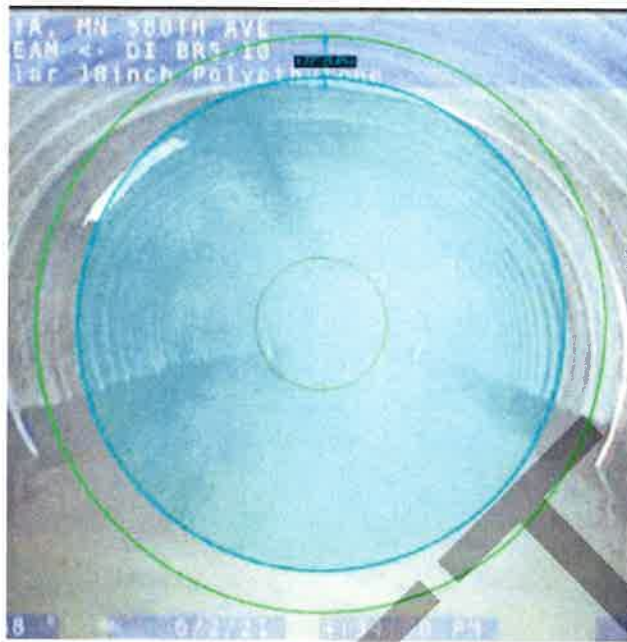

UPSTREAM-DI BR5-10_622021 25413
PM_611.0421_DFE_0294.jpg, 01:48:14, 611.04ft
Deformed Flexible Elliptical, change to: 10% / 9.8%

Figure 3: No Sand



UPSTREAM-DI BR5-14_622021 63020
PM_0.0000_MWL_0347.jpg, 00:01:04, 0.00ft
Water Level, 10% of the vertical dimension / 12%

Figure 4: With Sand